www.showerpanliners.com







shower tray collection technology that respects the planet



nanotechnology

Ohmyshower manufactures its products combining composite mineral and nanotechnology, in addition to the use of materials that favor the sustainability of the planet. It combines elastic resins with mineral fillers and a layer of the latest generation gel coat that result in products with greater durability and impact resistance, as well as significantly reducing their weight.

Shower trays

mineral

Sustainability Nanotechnology High quality materials **Durability** Weight reduction

Higher resistance

NANOTECHNOLOGY - MORE RESISTANCE AND LESS WEIGHT Application of nanotechnology to combine flexible resins with low-density

CHARACTERISTICS

COMPOSITION

Polyester resin and the

OUTER LAYER

Antislip Class C3. Highly resistant, durable non-slip Gel Coat.

TEXTURE

NEO

ANTISLIP CLASS 3

WATERPROOF

EASY TO CLEAN

ANTIBACTERIAL

QUALITY RAW MATERIAL

EASY TO REPAIR

IMPACT RESISTANT

EASY TO CUT



NATURE CURVE






NATURE




DEKOR



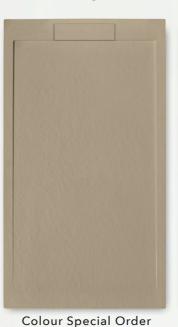











35.4"


62.9"

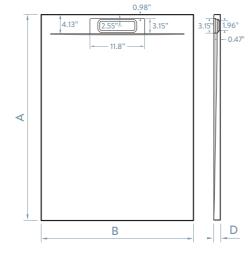





B 27.6"



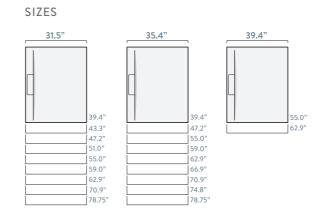

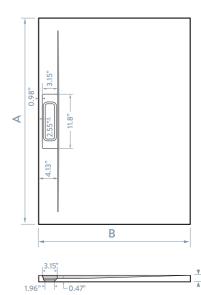



B 31.5"

A D 39.4" 0.98" 43.3" 0.98"

B 39.4" **A D** 55.0" 1.18" 62.9" 1.18"

RESIN COVER 300 INCLUDED

62.9"

RESIN COVER 300 INCLUDED

SIZES


SIPHON VALVE (RECTANGULAR OUTLET) INCLUDED


59.0"



SIPHON VALVE (RECTANGULAR OUTLET) INCLUDED



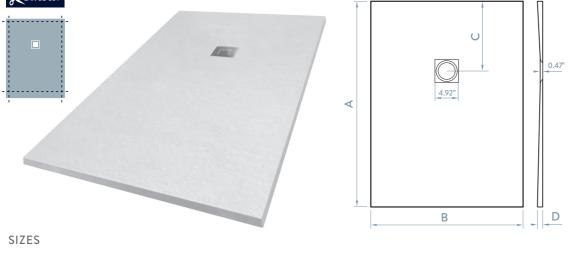

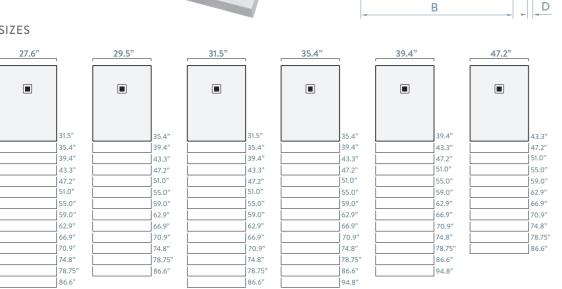

B 27.6" / 29.5" / 31.5"

A	С	D
31.5"	11.8"	0.98"
31.5"x 31.5"	Central	0.98"
35.4"	11.8"	0.98"
39.4"	11.8"	0.98"
43.3"	11.8"	0.98"
47.2"	13.8"	0.98"
51.0"	13.8"	1.06"
55.0"	15,7"	1.06"
59.0"	15,7"	1.14"
62.9"	17.7"	1.14"
66.9"	17.7"	1.14"
70.9"	19.7"	1.14"
74.8"	19.7"	1.18"
78.75"	19.7"	1.18"
86.6"	Central	1.18"

A	C	D
35.4"x 35.4"	Central	1.18"
39.4"x 35.4"	11.8"	1.18"
39.4"x39.4"	Central	1.18"
47.2"	13.8"	1.18"
55.0"	15,7"	1.18"
59.0"	15,7"	1.18"
62.9"	17.7"	1.18"
66.9"	17.7"	1.18"
70.9"	19.7"	1.18"
74.8"	19.7"	1.18"
78.75"	19.7"	1.18"
86.6"	Central	1.18"
94.8"x 39.4"	Central	1.18"

A	С	D
43.3"	Central	1.18"
47.2"	Central	1.18"
51.0"	Central	1.18"
55.0"	Central	1.18"
59.0"	Central	1.18"
62.9"	Central	1.18"
66.9"	Central	1.18"
70.9"	Central	1.18"
74.8"	Central	1.18"
78.75"	Central	1.18"
86.6"	Central	1.18"


1.5"	11.8"	0.98"
1.5"x 31.5"	Central	0.98"
5.4"	11.8"	0.98"
9.4"	11.8"	0.98"
3.3"	11.8"	0.98"
7.2"	13.8"	0.98"
1.0"	13.8"	1.06"
5.0"	15,7"	1.06"
9.0"	15,7"	1.14"
2.9"	17.7"	1.14"
6.9"	17.7"	1.14"
0.9"	19.7"	1.14"
4.8"	19.7"	1.18"
8.75"	19.7"	1.18"
6.6"	Central	1.18"

B 35.4" / 39.4"

_		
35.4"x 35.4"	Central	1.18"
39.4"x 35.4"	11.8"	1.18"
39.4"x 39.4"	Central	1.18"
47.2"	13.8"	1.18"
55.0"	15,7"	1.18"
59.0"	15,7"	1.18"
62.9"	17.7"	1.18"
66.9"	17.7"	1.18"
70.9"	19.7"	1.18"
74.8"	19.7"	1.18"
78.75"	19.7"	1.18"
86.6"	Central	1.18"
94.8"x 39.4"	Central	1.18"

B 47.2"	
С	D
Central	1.18"
	C Central



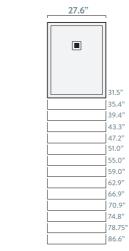

SIZES


39.4" 43.3" 47.2" 51.0" 55.0"

62.9"

66.9"

70.9" 74.8"

78.75"



B 27.6" / 29.5" / 31.5"

A	С	D
31.5"	11.8"	1.38"
31.5"x 31.5"	Central	1.38"
35.4"	11.8"	1.38"
39.4"	11.8"	1.38"
43.3"	11.8"	1.38"
47.2"	13.8"	1.38"
51.0"	13.8"	1.45"
55.0"	15,7"	1.45"
59.0"	15,7"	1.53"
62.9"	17.7"	1.53"
66.9"	17.7"	1.53"
70.9"	19.7"	1.53"
74.8"	19.7"	1.57"
78.75"	19.7"	1.57"
94 4"	Control	1 57"

B 35.4" / 39.4"

1.77" / 1.96" -

D

55.0" 59.0"

62.9"

70.9"

74.8"

78.75"

В

47.2" 51.0"

55.0"

59.0"

66.9"

A	С	D
35.4"x 35.4"	Central	1.5
39.4"x 35.4"	11.8"	1.5
39.4"x39.4"	Central	1.5
47.2"	13.8"	1.5
55.0"	15,7"	1.5
59.0"	15,7"	1.5
62.9"	17.7"	1.5
66.9"	17.7"	1.5
70.9"	19.7"	1.5
74.8"	19.7"	1.5
78.75"	19.7"	1.5
86.6"	Central	1.5
94.8"x 39.4"	Central	1.5
_		

В	47.2"

A	С	
13.3"	Central	1.5
17.2"	Central	1.5
51.0"	Central	1.
55.0"	Central	1.
9.0"	Central	1.
2.9"	Central	1.5
6.9"	Central	1.
70.9"	Central	1.
74.8"	Central	1.
78.75"	Central	1.
36.6"	Central	1.



STAINLESS STEEL GRATING INCLUDED







STAINLESS STEEL GRATING INCLUDED







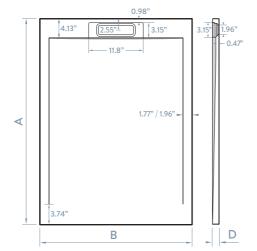



62.9" 1.18"

66.9" 1.18"

70.9" 1.18"

78.75" 1.18"

B 39.4"

A D

39.4" 1.18"

47.2" 1.18"

55.0" 1.18"


59.0" 1.18"


62.9" 1.18"


66.9" 1.18"

70.9" 1.18"


78.75" 1.18"

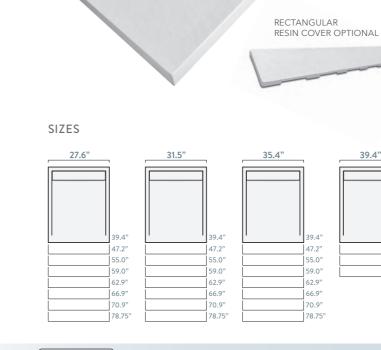

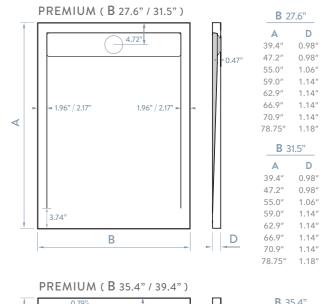


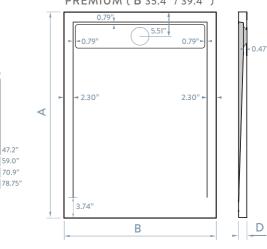

39.4"



SIZES

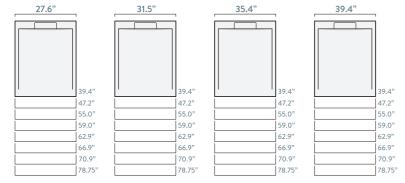

RESIN COVER 300 INCLUDED

SIPHON VALVE (RECTANGULAR OUTLET) INCLUDED



CAN BE CUT


SIPHON VALVE (HORIZONTAL OUTLET) INCLUDED

RECTANGULAR RESIN COVER OPTIONAL







NOT AVAILABLE IN THE US

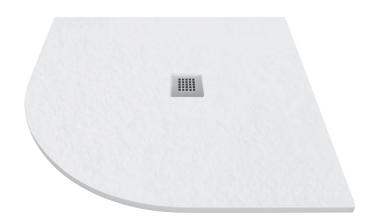

31.5" 35.4"



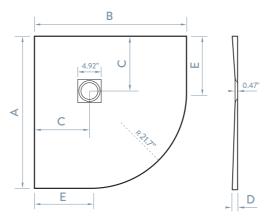

B 31.5"			
Α	С	D	Е
31.5"	12.4"	1.06"	9.84"

	B 35.4"		
Α	С	D	Е
35.4"	13.8"	1.06"	11.8"

B 39.4"

A C D E
39.4" 16.5" 1.06" 14.0"







STOCK DEKOR MODELS

STOCK HALIFAX NW 1001









STOCK ARABESCO NS 2021




STOCK SIZES



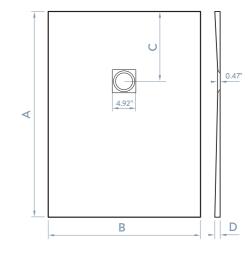


Α	C	
39.4"	11.8	0.
47.2"	13.8"	0.
55.0"	15.7"	1.
59.0"	15.7"	1.
62.9"	17.7"	1.
66.9"	17.7"	1.
70.9"	19.7"	1.

















Standard and **DEKOR** wall panels characteristics

The POLYCARBONATE wall panels are 0.237" thick.


They are the ideal solution to replace a bathtub for a shower tray and no building work is required.


Flat finish with a slightly sandy granulated effect. They are waterproof and water-repellent, so they improve insulation and guarantee protection against moisture and dampness. They can be easily cut, if their size has to be adjusted to fit them on the walls. They are practically unbreakable because they are quite flexible and extremely light, which means that a large panel can be held up and fit by just one person. As they are so light they are perfect to fit on drywall surfaces that do not support heavy loads.

The colour tones of all DEKOR designs can vary caused by many reasons.

SIZES TOLERANCE OF ~ 0.1"


47.25" 39.4" 35.6" 31.6" 27.5"

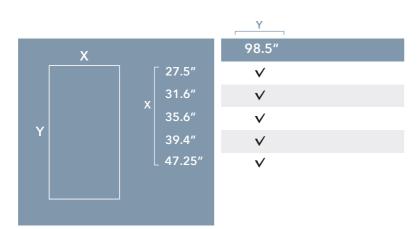

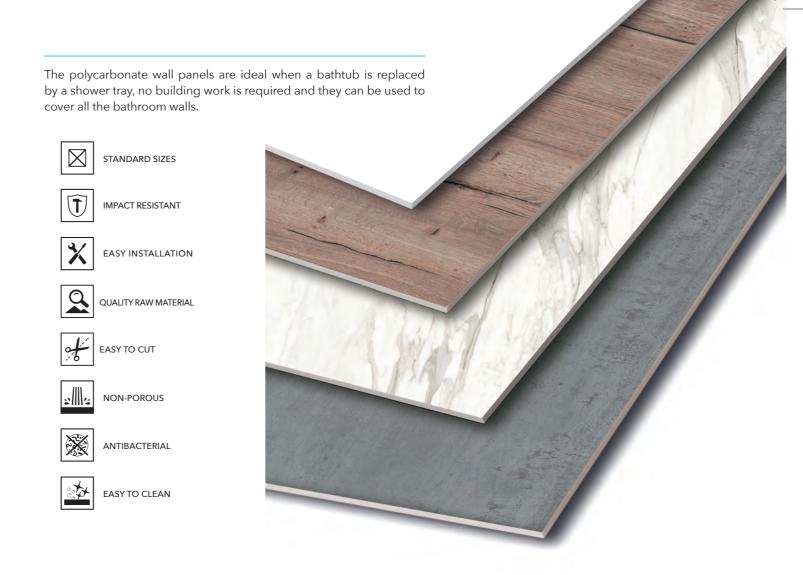

Standard colours wall panels



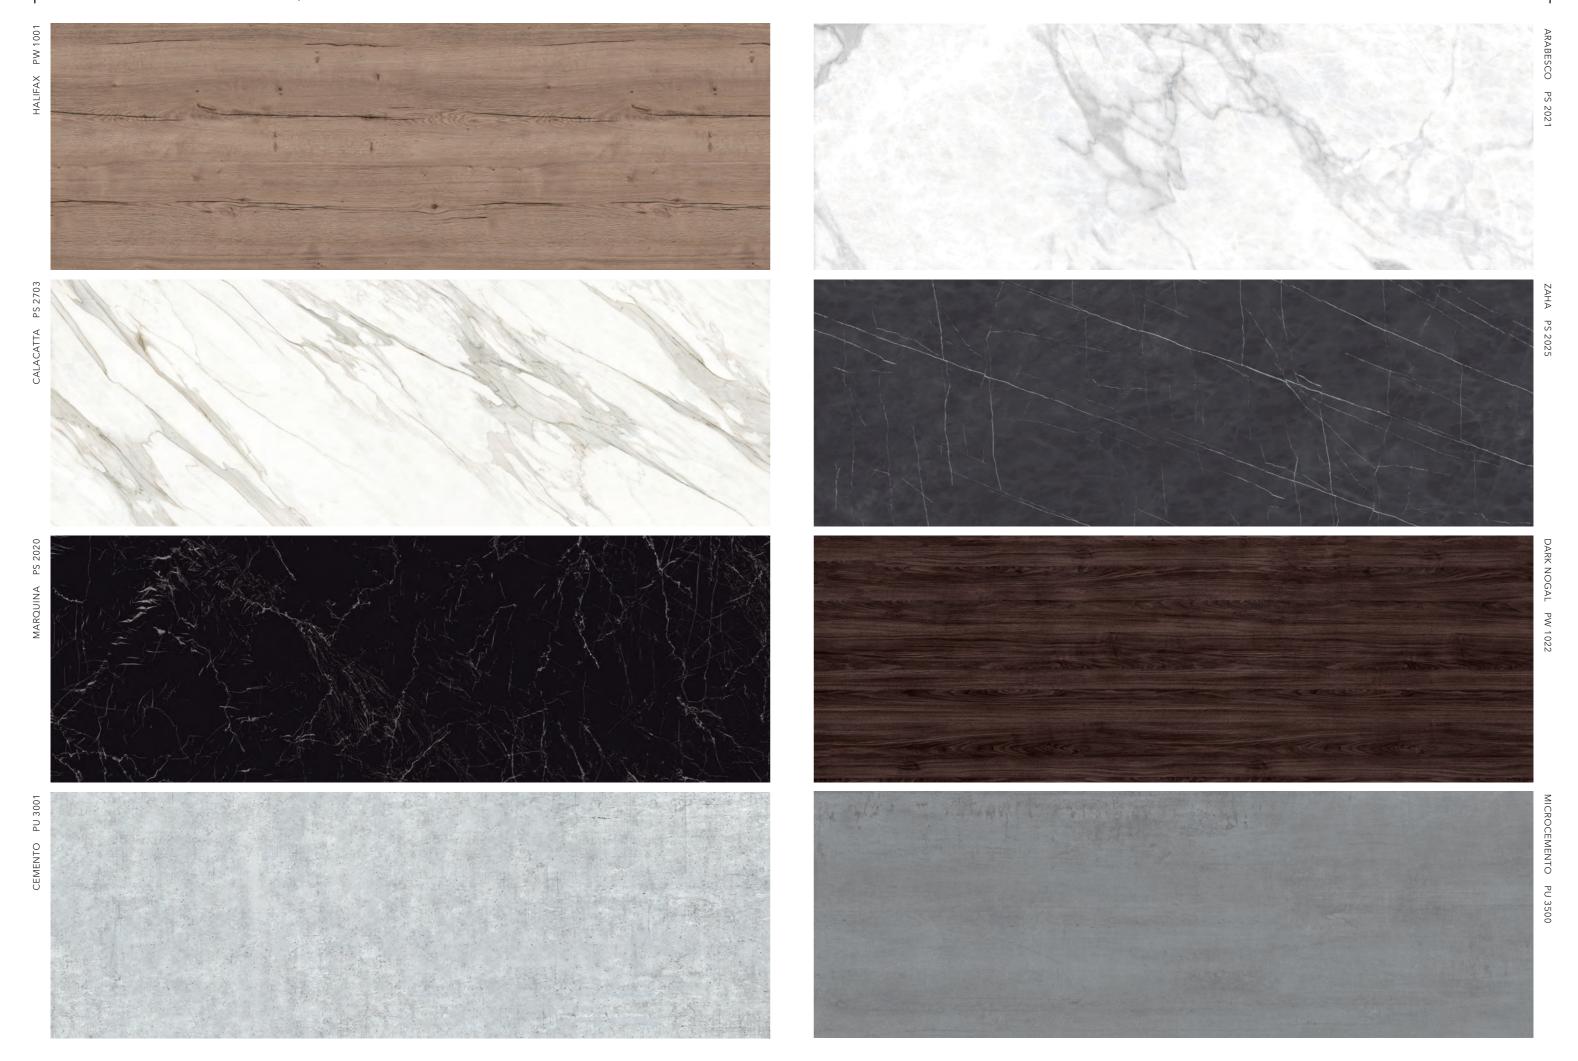

Accessories

SHOWER TRAY MODELS

	HERMES	KALOS	NATURE	MARCO	NEO	PREMIUM	NATURE CURVE
HORIZONTAL SIPHON VALVE			•	Ø		•	Ø
VERTICAL SIPHON VALVE			•	•		•	•
RECTANGULAR SIPHON VALVE	•	•			•		
STAINLESS STEEL GRATING			Ø	Ø			⊘
STAINLESS STEEL COLOUR GRATING			•	•			•
RESIN COVER RECTANGULAR						Ø	
STAINLESS STEEL COVER RECTANGULAR						•	
RESIN COVER 300		Ø			Ø		
STAINLESS STEEL GRATING STAINLESS STEEL COLOUR GRATING RESIN COVER RECTANGULAR STAINLESS STEEL COVER RECTANGULAR		⊘	⊘	⊘	⊘	⊘	

	INCLUDED
✓	OPTIONAL ACCESSOR









The Showerband Kit is a 118" long, multiaxial and sealing band flexible to ensure the seal of the joint with walls and floors in the installation of shower trays, bathtubs and other sanitary ware. It has high adhesion and good bonding in a wide range of substrates. It remains flexible throughout its useful life. In addition to water, it is an effective barrier against gases such as methane and radon.

SHOWERBAND SEALING BAND



NOT AVAILABLE IN THE US



PAINT KIT







SIPHON VALVE




STAINLESS STEEL GRATING

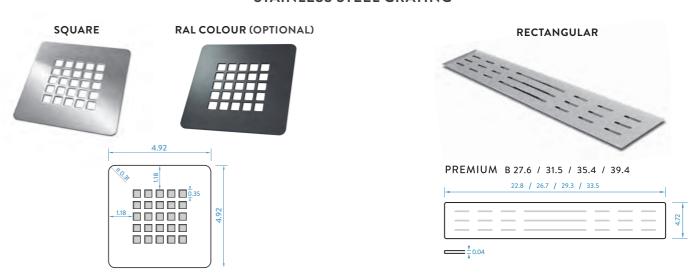


RESIN COVER (OPTIONAL)

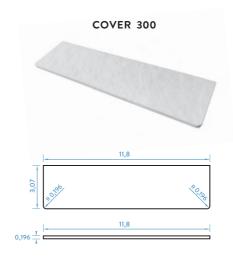



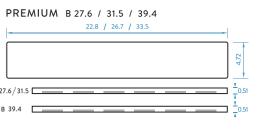

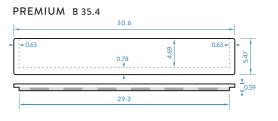

CERTIFICATES

TECHNICAL	DATA SHE	ET OF TESTED P	RODUCT	
SHOWERTRAY SAMPLE	REFERENCED I	N AIDIMME AS 171206	7-01	
TESTS PERFORMED	NORM	ATIVE	RESULTS	
Aptitude for steaming (valuation) Water everyation (valuation) Stability	59 MS2 69 1454		Correct Correct Correct	
Resistance to chemicals and dyes (val			Without any deler	
Resistance to temperature variations	94,1452	172016	Without any deter	
According to the tests performe standard EN 14527:2016 1 'Sho following system: EN 14527-CL1	wer trays for de			
SHOWER TRAY SAMPLE	REFERENCED I	N AIDIMME AS 171206	7-01	
TESTS PERFORMED TEST	NG METHOD	NORMATIVE	RESULTS	
	14688	0,11	No substrate app	
Surface stability	agraph 5.8	.No substrate appearant	Collect	
	14688 agraph 5.7	0,55 No substrate appearant	No substrate appear	
Impact resistance Ball drop EN: - Drop height Atts - Valuation	z49 schment A-4	1000 No.deterioration	Without any dintor after drop height of Correct	
Document from AFNOR NF017 i sanitarylequipment* the shower				
In accordance with the UNE EN crosslinked acrylic sheets obtain				
TESTS PERFORMED	NORM	ATIVE	RESULTS	
Slip resistance	in a second			
Kind of slipperiness	Line B	NV 12633	Class 3	
SHOWER TRAY				
TESTS PERFORMED	N	ORMAT I VE	RESULTS	
Slip resistance	DI	IN 51097	Class C	
Abrasion	EN	N 14688	Correct	
Resistance to chemicals and d	yes EN	N 14527	Correct	
Bacterial and fungal strain tes	t EN	N ISO 846	Correct	
Light solidity (Color grade)	EN	N ISO 4892-2	Class C	

TECHNICAL DATA SHEET OF TESTED PRODUCT

SHOWER TRAY "DEKOR RANG	E"	
TESTS PERFORMED	NORMATIVE	RESULTS
Aptitude for cleaning Surface appearance (valuation)	(14 (4527 2018	Correct
Water evacuation (Valuation)	1N 145TX PRINT	Dorrect
Bottom staniiity (valuation)	EN VALUE VALUE	Correct
Resistance to chemicate dyes (valuation)	10 145110705	Without any deterioration
Resistance to lengerature variations	10 L(c) 1 Core	Without you detectoration

roling to the tests performed, they can be assigned to the sample, class 1, according to the standardEN 14527;2016 'Shower trays for domestic use' and its designation corresponds to the following system

TESTS PERFORMED	NORMATIVE	RESULTS	
Slip resistance	UNU ENV 126EE	All	
diam's tallementary		Class S	

TESTS PERFORMED	NORMATIVE	RESULTS
Water vapor resistance (Grade)	UNE EN 438-2	5
limensional stability of high temperature Cumulative dimensional variation longitudinal direction (%). Cumulative dimensional variation perpendicular direction (%).	UNE EN 438-2	0,15
mpact resistance. Small diameter pall (Newtone)	UNE EN 438-2	60
mpact resistance. Large dismeter ball Height (mm) Dismeter mark (mm)	UNE EN 438-2	2000 <10
ight solidity (Grayscale grade)	UNE EN 438-2	5
Nain Resistance (Grade)	UNE EN 438-2	
Azation (16h) Coffee (16h) Sacium Inyaloxide (25%) (10 min) Hydroges peroxide (25%) (10 min) Shoe Polipis Finalizate (10 min)		5


TECHNICAL DATA SHEET OF TESTED PRODUCT

TESTS PERFORMED	NORMATIVE	RESULTS
Abrasion resistance •Pt (Number of cycles) •Classification	UNE-59 15468 Annex A	≥ idon ACA
Swelling of thickness (%)	150 24835	0.0

POLYCARBONATE PANELS. SAMPLE REFERENCED IN AIDIMME AS 2001015-01 TESTS PERFORMED NORMATIVE

AIDIMME








The panel is 6 mm thick (+/-1)
Engraved: ICE®, TEX™, Grano 35, ANTI-REFLEX®


EXCELLENT REACTION TO FIRE, meeting the requirements of EN 13501-1 (EUROPEAN STANDARDS ON BUILDINGS). In case of fire, the sheet shall melt allowing the ventilation and evacuation of heat and smoke, preventing the fire



ICC-ES PMG Product Certificate

PMG-1568





2021, 2018, 2015, 2012, 2009 and 2006 International Plumbing Code® (IPC)

2021, 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)

2021, 2018, 2015, 2012, 2009 and 2006 Uniform Plumbing Code® (UPC)*

2015, 2010 and 2005 National Plumbing Code of Canada®

*Uniform Plumbing Code is a copyrighted publication of the International Association of Plumbing and Mechanical Officials

**National Plumbing Code of Canada is a copyrighted publication of National Research Council Canada



Listings are not to be construed as representing aesthetics or any other attributes not specifically addressed, nor are they to be construed as an endorsement of the subject of the listing or a recommendation for its use. There is no warranty by ICC Evaluation Service, LLC, express or implied, as to any finding or other matter in this listing, or as to any product covered by the listing.

Copyright © 2021 ICC Evaluation Service, LLC. All rights reserved.

PMG-1568 | Most Widely Accepted and Trusted

Compliance with the following standard:

CSA B45.5 / IAPMO Z124-2017, Plastic Plumbing Fixtures





ICC-ES PMG Listing Mark: ICC-ES Plumbing Mechanical and Fuel Gas (PMG) listings are issued to products that comply with applicable standards and codes. After the PMG listing has been issued, ongoing inspections at the manufacturer's site will ensure that the quality of the product that receives an ICC-ES PMG listing remains consistent.

ICC-ES PMG Product Certificate

PMG-1623

Effective Date: May 2021

GENERAL INFORMATION

FAQS

Can the products be custom made?

Our products can be ordered with a margin of ±0.7%.

How should the product be stored once it has been received?

It should be stored horizontally on a flat surface.

How can the products be repaired?

Although they are very strong and impact resistant, we have repair kits available for our customers.

Can the product be cut?

Yes, with a diamond cutting disc.

How do you clean the product?

Neutral soap and water applied with a sponge should be used. Never use abrasive products or tools.

What material should be used to install the products?

To stick and/or seal the products use MS flexible polyurethane sealant and/or neutral silicone.

WARRANTY

All our products come with a three year warranty according to the existing European regulations. The following circumstances shall void the warranty:

- Damage caused by misuse
- Unsuitable storage and handling of the product
- Incorrect use of cleaning products
- Inappropriate installation of the product

Our warranty covers only and exclusively the exchange of the product.

The colour tones of all DEKOR designs can vary caused by many reasons.

PACKAGING AND TRANSPORTATION

The products are packed and delivered in separate protected cardboard boxes.

www.showerpanliners.com



USA HEADQUARTERS

84 Lower Dowda Mill Rd. Jasper, GA 30143

(650) 763-2185

info@showerpanliners.com www.showerpanliners.com



STOCK

WHITE RAL 9003




PEARL GREY RAL 7035



BEIGE RAL 9001



GREY RAL 7037



MOKA RAL 1001



GRAPHITE RAL 7016

